


# **DUST SUPPRESSION**

## **RAIN WATER CANNONS**

### **TURBINE GEARED**

by



**Q water Pty Ltd**

ABN 68 009 465 347

Head Office Ph: +61 (0) 7 3865 5555  
Head Office Fax: +61 (0) 7 3865 5555



Mobile Ph QLD: +61 (0) 417 590 660  
Mobile Ph ALL: +61 (0) 417 590 660

Email: [sales@qwater.com.au](mailto:sales@qwater.com.au)


Web: [www.qwater.com.au](http://www.qwater.com.au)

Nodolini—Italy






**'NODOLINI—43deg'**  
**DUST SUPPRESSION WATER CANNON—TURBINE GEARED**  
**QW-WCNS45DS-43-50-BSP**



**S45DS - 2" (50mm)**

- Medium Distance Trajectory
- 43 deg—Up Spray Angle
- 2" BSP (female) Thread Connection
- Minimum 4deg-360deg—Part/Full Circle
- Nozzles Supplied: 18mm, 20mm, 22mm
- Corrosion Resistant Materials
- 3.0-6.0bar Operating Pressure Range

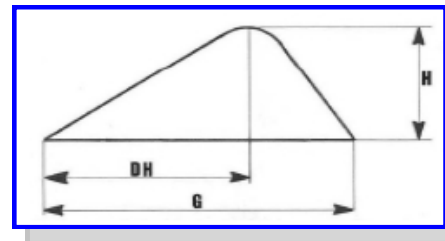

**NODOLINI**  
*Q water always has your spraying needs covered. Call us for a great price!*

Nozzle Size (mm)	Pressure (kPa)	Discharge (l/min)	Length of Jet "G" (m)	Height "H" (m)	Distance at Height "DH" (m)
18	303 - 405 - 506	370 - 427 - 477	34 - 37 - 42	11 - 12.5 - 14	20 - 23 - 25
20	303 - 405 - 506	456 - 527 - 590	36 - 41 - 46	11.5 - 13.5 - 15	22 - 23.5 - 26.5
22	405 - 506 - 607	638 - 713 - 780	42 - 47 - 49	14 - 15.5 - 17	24.5 - 27.5 - 29.5
24	405 - 506 - 607	730 - 817 - 895	43 - 48 - 52	14.5 - 16.5 - 18	25.5 - 28.5 - 30.5

**\*NOTE—All technical data is characteristic & not binding\***

**FEATURES:**



1. Turbine constant geared drive irrigation sprinkler
2. Conical water discharge barrel for high/long performance
3. Flange adapter available for alternative mounting
4. No vibration – smooth operation
5. No mechanical brake required
6. Perfect functioning on steep terrain
7. Suitable for steep mining stockpiles

**Q water Pty Ltd**  
 ABN 68 009 465 347



Head Office Ph: +61 (0) 7 3865 5555  
 Head Office Fax: +61 (0) 7 3865 5555

Mobile Ph **QLD**: +61 (0) 417 590 660  
 Mobile Ph **ALL**: +61 (0) 417 590 660

Email: [sales@qwater.com.au](mailto:sales@qwater.com.au)  
 Web: [www.qwater.com.au](http://www.qwater.com.au)





**'NODOLINI—43deg'**  
**DUST SUPPRESSION WATER CANNON—TURBINE GEARED**  
**QW-WCNS60DS-43-50-BSP**

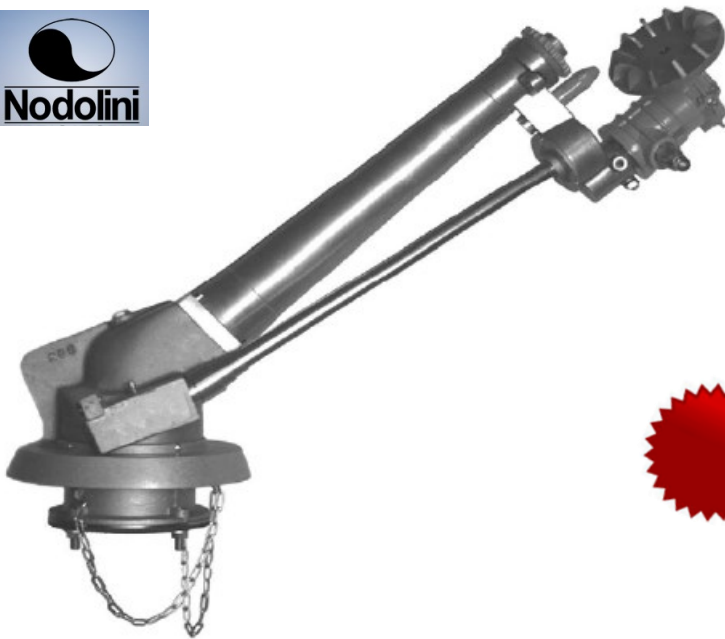

**S60DS - 2" (50mm)**

- Medium Distance Trajectory
- 43 deg—Up Spray Angle
- 2" BSP (female) Thread Connection
- Minimum 4deg-360deg—Part/Full Circle
- Nozzles Supplied:  
20mm, 22mm, 24mm, 26mm
- Corrosion Resistant Materials
- 3.0-7.0bar Operating Pressure Range

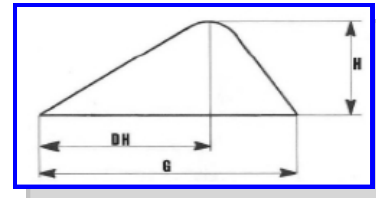

**NODOLINI**  
*Q water always has your spraying needs covered. Call us for a great price!*

Nozzle Size (mm)	Pressure (kPa)	Discharge (l/min)	Length of Jet "G" (m)	Height "H" (m)	Distance at Height "DH" (m)
20	303 - 405 - 506	440 - 506 - 566	37 - 41 - 44	11 - 14 - 17	22 - 26 - 29
22	303 - 405 - 506	530 - 612 - 684	38 - 42 - 45	12 - 15 - 19	23 - 27 - 30
24	405 - 506 - 608	729 - 816 - 895	44 - 48 - 51	16.5 - 18 - 20	28 - 32 - 36
26	405 - 506 - 608	857 - 957 - 1050	46 - 50 - 52	16.5 - 18.5 - 20.5	30 - 33 - 36
28	405 - 506 - 608	994 - 1110 - 1220	48 - 51 - 54	17 - 19 - 21.5	31 - 34 - 37
30	506 - 608 - 709	1273 - 1394 - 1513	55 - 62 - 64	21 - 23 - 25	39 - 43 - 45

**FEATURES:**

1. Turbine constant geared drive irrigation sprinkler
2. Conical water discharge barrel for high/long performance
3. Flange adapter available for alternative mounting
4. No vibration – smooth operation
5. No mechanical brake required
6. Perfect functioning on steep terrain
7. Suitable for steep mining stockpiles

**\*NOTE—All technical data is characteristic & not binding\***

**Q water Pty Ltd**  
 ABN 68 009 465 347

Head Office Ph: +61 (0) 7 3865 5555  
 Head Office Fax: +61 (0) 7 3865 5555

Mobile Ph QLD: +61 (0) 417 590 660  
 Mobile Ph ALL: +61 (0) 417 590 660

Email: [sales@qwater.com.au](mailto:sales@qwater.com.au)  
 Web: [www.qwater.com.au](http://www.qwater.com.au)

