



'NODOLINI—43deg'
DUST SUPPRESSION WATER CANNON—TURBINE GEARED
QW-WCNS45DS-43-50-BSP



S45DS - 2" (50mm)

- Medium Distance Trajectory
- 43 deg—Up Spray Angle
- 2" BSP (female) Thread Connection
- Minimum 4deg-360deg—Part/Full Circle
- Nozzles Supplied: 18mm, 20mm, 22mm
- Corrosion Resistant Materials
- 3.0-6.0bar Operating Pressure Range

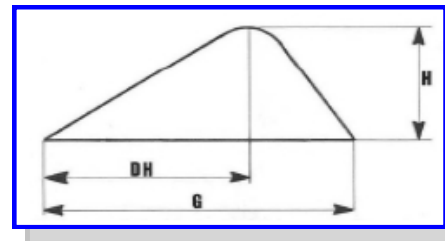

NODOLINI
Q water always has your spraying needs covered. Call us for a great price!

Nozzle Size (mm)	Pressure (kPa)	Discharge (l/min)	Length of Jet "G" (m)	Height "H" (m)	Distance at Height "DH" (m)
18	303 - 405 - 506	370 - 427 - 477	34 - 37 - 42	11 - 12.5 - 14	20 - 23 - 25
20	303 - 405 - 506	456 - 527 - 590	36 - 41 - 46	11.5 - 13.5 - 15	22 - 23.5 - 26.5
22	405 - 506 - 607	638 - 713 - 780	42 - 47 - 49	14 - 15.5 - 17	24.5 - 27.5 - 29.5
24	405 - 506 - 607	730 - 817 - 895	43 - 48 - 52	14.5 - 16.5 - 18	25.5 - 28.5 - 30.5

NOTE—All technical data is characteristic & not binding

FEATURES:

1. Turbine constant geared drive irrigation sprinkler
2. Conical water discharge barrel for high/long performance
3. Flange adapter available for alternative mounting
4. No vibration – smooth operation
5. No mechanical brake required
6. Perfect functioning on steep terrain
7. Suitable for steep mining stockpiles

Q water Pty Ltd
 ABN 68 009 465 347

Head Office Ph: +61 (0) 7 3865 5555
 Head Office Fax: +61 (0) 7 3865 5555

Mobile Ph **QLD**: +61 (0) 417 590 660
 Mobile Ph **ALL**: +61 (0) 417 590 660

Email: sales@qwater.com.au
 Web: www.qwater.com.au