

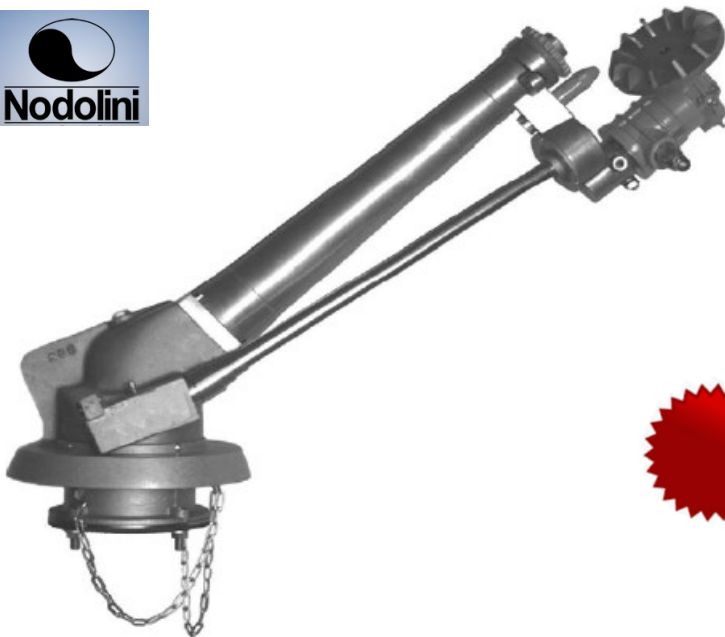


'NODOLINI—43deg'
DUST SUPPRESSION WATER CANNON—TURBINE GEARED
QW-WCNS60DS-43-50-BSP



S60DS - 2" (50mm)

- Medium Distance Trajectory
- 43 deg—Up Spray Angle
- 2" BSP (female) Thread Connection
- Minimum 4deg-360deg—Part/Full Circle
- Nozzles Supplied:
20mm, 22mm, 24mm, 26mm
- Corrosion Resistant Materials
- 3.0-7.0bar Operating Pressure Range

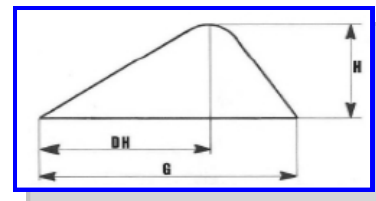

NODOLINI
Q water always has your spraying needs covered. Call us for a great price!

Nozzle Size (mm)	Pressure (kPa)	Discharge (l/min)	Length of Jet "G" (m)	Height "H" (m)	Distance at Height "DH" (m)
20	303 - 405 - 506	440 - 506 - 566	37 - 41 - 44	11 - 14 - 17	22 - 26 - 29
22	303 - 405 - 506	530 - 612 - 684	38 - 42 - 45	12 - 15 - 19	23 - 27 - 30
24	405 - 506 - 608	729 - 816 - 895	44 - 48 - 51	16.5 - 18 - 20	28 - 32 - 36
26	405 - 506 - 608	857 - 957 - 1050	46 - 50 - 52	16.5 - 18.5 - 20.5	30 - 33 - 36
28	405 - 506 - 608	994 - 1110 - 1220	48 - 51 - 54	17 - 19 - 21.5	31 - 34 - 37
30	506 - 608 - 709	1273 - 1394 - 1513	55 - 62 - 64	21 - 23 - 25	39 - 43 - 45

FEATURES:

1. Turbine constant geared drive irrigation sprinkler
2. Conical water discharge barrel for high/long performance
3. Flange adapter available for alternative mounting
4. No vibration – smooth operation
5. No mechanical brake required
6. Perfect functioning on steep terrain
7. Suitable for steep mining stockpiles

NOTE—All technical data is characteristic & not binding

Q water Pty Ltd
 ABN 68 009 465 347

Head Office Ph: +61 (0) 7 3865 5555
 Head Office Fax: +61 (0) 7 3865 5555

Mobile Ph QLD: +61 (0) 417 590 660
 Mobile Ph ALL: +61 (0) 417 590 660

Email: sales@qwater.com.au
 Web: www.qwater.com.au

